




ITEMS			
ID	DESCRIPTION	MATERIAL	PART NUMBER
1	MOUNTING FRAME	6063 ALUMINUM	MT - EX33805
2	GLAZING	GLASS 16mm (5/8") TO 19mm (3/4")	
3	FULCRUM GLAZING	SANTOPRENE	AD - VY3255
4	BUTYL TAPE		ADTA1/8X3/8B
5	SEALANT	SILICONE	
6	TRIM RING	6063 ALUMINUM	
7	TRIM SCREWS	S/S	
8	BEDDING COMPOUND	CUSTOMER TO SUPPLY	
9	BACKFILL	URETHANE	

STANDARD DIMENSIONS

ID	DESCRIPTION	DIMENSION
A	FLANGE COVERAGE	25mm (1")
B	EXTERIOR PROTRUSION	4mm (3/16")
C	INTERIOR PROTRUSION	47mm (1 7/8")
D	SPIGOT TO CLEAR VIEW	34 mm (1 5/16")
E	FLANGE THICKNESS	4mm (3/16")

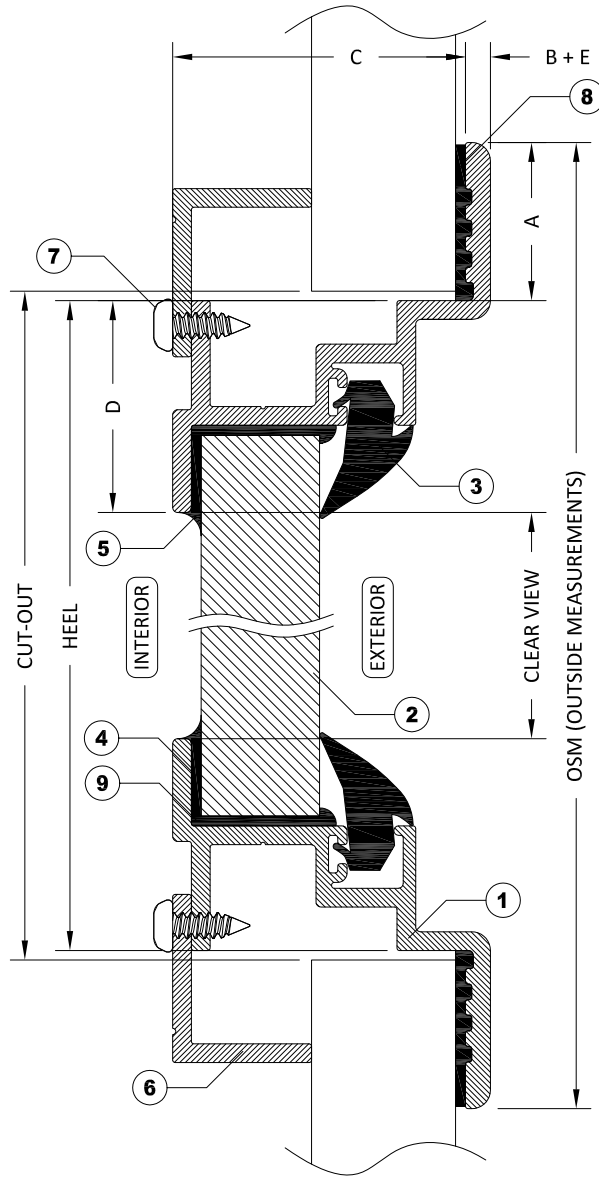

SECTION A-A WITH CLAMP IN INSTALLATION

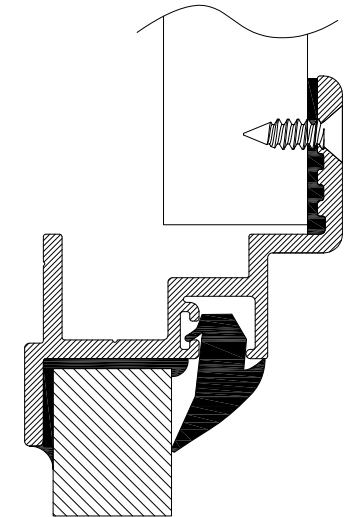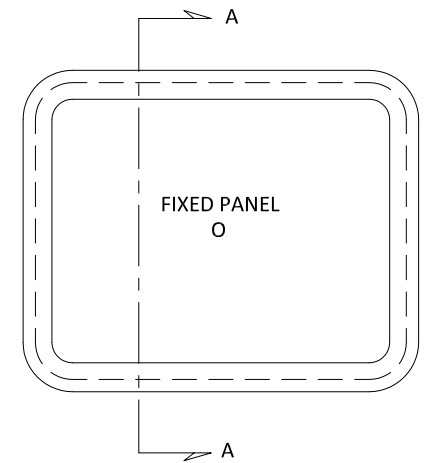

OPTIONAL BOLT-ON INSTALLATION

NOTES:

- GENERAL HEEL TOLERANCE +0/-1/4" OVERALL
- AVAILABLE WITH 3" (76mm), 4" (102mm) OR MITERED CORNERS
- STANDARD MOUNTING HOLES ARE 3/16" WITH #10 COUNTERSUNK ON 6" NOMINAL CENTERS

DRAWING NUMBER

410F

DIAMOND SEA GLAZE MANUFACTURING LTD.
26995 GLOUCESTER WAY, LANGLEY B.C.
CANADA V4W 3Y3
TOLL FREE: 1-800-770-0455
PHONE: 604-607-0091
FAX: 604-607-0092

SCALE

NTS

BY

LD

ALL DRAWINGS AND ANY ASSOCIATED INFORMATION HEREON CONTAIN PROPRIETARY AND/OR CONFIDENTIAL INFORMATION, AND SHALL NOT BE REPRODUCED, DISCLOSED OR SUBMITTED TO ANY THIRD PARTY WITHOUT PRIOR CONSENT FROM DIAMOND SEA GLAZE MANUFACTURING LTD.



Diamond Sea Glaze

Crystal Clear. Rock Solid.

ITEM NAME

410F

REVISION

0

ITEM DESCRIPTION

COMMERCIAL DUTY WINDOWS